



of 2011, we are specialized in Lighting area for 10 year. We focused on the LED lighting area, offer proper and energy saving lighting solutions for client; Produce reliable, stable, economic LED lighting fixture.

During the production, we have deeply cooperation with PHILIPS and OSRAM, making higher quanlity products.

Excellent technical force and Rich practical experienc, make

HONNEX products get highly praised and recogonized by clients from all over the world. Our products export to Europe, America, Southeast Asia, South America, Australia and so on.

Lighting products and market developing are rapid development, we always looking for much energy saving, much better quality lighting solutions, and be your industrial lighting partner.





HIGH BAY HB180

HONNEX



The HB180 is high power LED Highbay light fixture, it have various installation methods, excellent control for the beam angle, reflector/driver/heatsink integration, conveniently using and installation.

·IP65,fit for variours environment. ·Beam angle: 25D/60D/90D

·Efficacy: 100LM/W, 135LM/W

·Lifetime: 30000Hours/50000Hours

·Chips: SANAN, PHILIPS, OSRAM

·Driver: HONNEX, MEANWELL, PHILIPS

Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|------------------------|---------|----------|--------|------|---------|------------|---------|------------------|----------|
| HB180 LED300 300W ES | 300 | 100lm/W | 30000 | 0.98 | PHILIPS | 100-305Vac | HONNEX | IP65 | 3years |
| HB180 LED400 400W ES | 400 | 100lm/W | 40000 | 0.98 | PHILIPS | 100-305Vac | HONNEX | IP65 | 3years |
| HB180 LED500 500W ES | 500 | 100lm/W | 50000 | 0.98 | PHILIPS | 100-305Vac | HONNEX | IP65 | 3years |
| HB180 LED800 800W ES | 800 | 100lm/W | 80000 | 0.98 | PHILIPS | 100-305Vac | HONNEX | IP65 | 3years |
| HB180 LED1000 1000W ES | 1000 | 100lm/W | 100000 | 0.98 | PHILIPS | 100-305Vac | HONNEX | IP65 | 3years |
| HB180 LED405 300W HQ | 300 | 135lm/W | 40500 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HB180 LED540 400W HQ | 400 | 135lm/W | 54000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HB180 LED675 500W HQ | 500 | 135lm/W | 67500 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HB180 LED1080 800W HQ | 800 | 135lm/W | 108000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HB180 LED1350 1000W H | 1000 | 135lm/W | 135000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |

*More information please check www.honnexlighting.com

HIGH BAY HL550

HONNEX



The HL550 is LED Linear High Bay light, it can replace of the tube light. Widely used in the places require high-bay lighting factoies, workshops, warehouses and so on. It have variours installation methods by conveniently way.

·IP65, fit for warehouses, workshops and so on.

·Beam angle: 60D/60D/60*150D

·Efficacy: 120LM/W ·Lifetime: 50000Hours

·Chips: SANAN, PHILIPS, OSRAM

·Driver: HONNEX, MEANWELL, PHILIPS



Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Leve | l Warranty |
|----------------------|---------|----------|--------|------|---------|------------|---------|-----------------|------------|
| HL550 LED60 50W ES | 50 | 120lm/W | 6000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED120 100W ES | 100 | 120lm/W | 12000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED180 150W ES | 150 | 120lm/W | 18000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED240 200W ES | 200 | 120lm/W | 24000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED300 250W ES | 250 | 120lm/W | 30000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED360 300W ES | 300 | 120lm/W | 36000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED480 400W ES | 400 | 120lm/W | 48000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED600 500W ES | 500 | 120lm/W | 60000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| HL550 LED60 50W HQ | 50 | 120lm/W | 6000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HL550 LED120 100W HQ | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HL550 LED180 150W HQ | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HL550 LED240 200W HQ | 200 | 120lm/W | 24000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HL550 LED300 250W HQ | 250 | 120lm/W | 30000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HL550 LED360 300W HQ | 300 | 120lm/W | 36000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HL550 LED480 400W HQ | 400 | 120lm/W | 48000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| HL550 LED600 500W HQ | 500 | 120lm/W | 60000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |

*More information please check www.honnexlighting.com

2

1



HIGH BAY HB950

HONNEX



The HB950 LED High Bay light using a stylish design, and Die-cast aluminum, strong and durable, good heat dissipation performance. Equiped with 40D PC reflector, and 60D/120D aluminum reflector.

·IP65, fit for various environment. ·High quality Die-cast Aluminum.

·Efficacy: 120LM/W ·Lifetime: 50000Hours

·Chips: SANAN, PHILIPS, OSRAM

·Driver: HONNEX, MEANWELL, PHILIPS

Specification

| Model | Wattage | Efficacy | Lumens | PF | CRI | Voltage | Driver | Protection Leve | Warranty |
|----------------------|---------|----------|--------|------|-------|------------|---------|-----------------|----------|
| HB950 LED72 60W ES | 60 | 120lm/W | 7200 | 0.98 | Ra≥80 | 100-305Vac | HONNEX | IP65 | 5years |
| HB950 LED120 100W ES | 100 | 120lm/W | 12000 | 0.98 | Ra≥80 | 100-305Vac | HONNEX | IP65 | 5years |
| HB950 LED180 150W ES | 150 | 120lm/W | 18000 | 0.98 | Ra≥80 | 100-305Vac | HONNEX | IP65 | 5years |
| HB950 LED240 200W ES | 200 | 120lm/W | 24000 | 0.98 | Ra≥80 | 100-305Vac | HONNEX | IP65 | 5years |
| HB950 LED300 250W ES | 250 | 120lm/W | 30000 | 0.98 | Ra≥80 | 100-305Vac | HONNEX | IP65 | 5years |
| HB950 LED360 300W ES | 300 | 120lm/W | 36000 | 0.98 | Ra≥80 | 100-305Vac | HONNEX | IP65 | 5years |
| HB950 LED72 60W HQ | 60 | 120lm/W | 7200 | 0.98 | Ra≥80 | 220-240Vac | PHILIPS | IP65 | 5years |
| HB950 LED120 100W HQ | 100 | 120lm/W | 12000 | 0.98 | Ra≥80 | 220-240Vac | PHILIPS | IP65 | 5years |
| HB950 LED180 150W HQ | 150 | 120lm/W | 18000 | 0.98 | Ra≥80 | 220-240Vac | PHILIPS | IP65 | 5years |
| HB950 LED240 200W HQ | 200 | 120lm/W | 24000 | 0.98 | Ra≥80 | 220-240Vac | PHILIPS | IP65 | 5years |
| HB950 LED300 250W HQ | 250 | 120lm/W | 30000 | 0.98 | Ra≥80 | 220-240Vac | PHILIPS | IP65 | 5years |
| HB950 LED360 300W HQ | 300 | 120lm/W | 36000 | 0.98 | Ra≥80 | 220-240Vac | PHILIPS | IP65 | 5years |

 $\hbox{^*More information please check www.honnexlighting.com}\\$

HIGH BAY HB820U

HONNEXLighting expert



The HB20U using UFO design, fir for various environment. IP65 Level, best choice for warehouse, workshops and so on.

·IP65, fit for various environment.

·Beam Angle: 60D/90D/110D

·Efficacy: 125LM/W ·Lifetime: 50000Hours

·Chips: SANAN, PHILIPS, OSRAM

·Driver: HONNEX, MEANWELL, PHILIPS



| Model | Wattage | Efficacy | Lumens | PF | Voltage | Driver | Protection Level | Warranty |
|--------------------------|---------|----------|--------|------|------------|----------|------------------|----------|
| HB820U LED130 100W Hook | 100 | 125lm/W | 13000 | 0.98 | 100-305Vac | Meanwell | IP65 | 5years |
| HB820U LED200 160W Hook | 160 | 125lm/W | 20000 | 0.98 | 100-305Vac | Meanwell | IP65 | 5years |
| HB820U LED250 200W Hook | 200 | 125lm/W | 25000 | 0.98 | 100-305Vac | Meanwell | IP65 | 5years |
| HB820U LED130 100W Brack | Œ 60 | 125lm/W | 13000 | 0.98 | 100-305Vac | Meanwell | IP65 | 5years |
| HB820U LED200 160W Brack | ie 100 | 125lm/W | 20000 | 0.98 | 100-305Vac | Meanwell | IP65 | 5years |
| HB820U LED250 200W Brack | æ 150 | 125lm/W | 25000 | 0.98 | 100-305Vac | Meanwell | IP65 | 5years |







Floodlight FL150

HONNEX



The FL150 is exquisite and compact LED Flood light. It have Stylish appearance, small but exquisite. 30 W - 200W for your choices, fit for various scence.

·IP67, widely use for billboard, park, shopping center

and so on.

·Beam Angle: 60D/90D ·Efficacy: 110LM/W ·Lifetime: 50000Hours

·SANAN,PHILIPS,OSRAM

·Driver: HONNEX,MEANWELL,PHILIPS



Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|----------------------|---------|----------|--------|------|---------|------------|---------|------------------|----------|
| FL150 LED33 30W ES | 30 | 110lm/W | 3300 | 0.98 | Sanan | 100-305Vac | HONNEX | IP67 | 5years |
| FL150 LED55 50W ES | 50 | 110lm/W | 5500 | 0.98 | Sanan | 100-305Vac | HONNEX | IP67 | 5years |
| FL150 LED110 100W ES | 100 | 110lm/W | 11000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP67 | 5years |
| FL150 LED165 150W ES | 150 | 110lm/W | 16500 | 0.98 | Sanan | 100-305Vac | HONNEX | IP67 | 5years |
| FL150 LED220 200W ES | 200 | 110lm/W | 22000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP67 | 5years |
| FL150 LED110 100W HQ | 100 | 110lm/W | 11000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP67 | 5years |
| FL150 LED165 150W HQ | 150 | 110lm/W | 16500 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP67 | 5years |
| FL150 LED220 200W HQ | 200 | 110lm/W | 22000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP67 | 5years |

*More information please check www.honnexlighting.com



Floodlight FL370

HONNEX Lighting expert



The FL370 is the LED Flood light which have narrow beam angle with high power. Various beam angle meet different requirement.

·IP Rating: IP65

·Beam Angle: 5D/10D/20D/30D/60D

·Efficacy: 110LM/W ·Lifetime: 50000Hours

·Chips: SANAN, PHILIPS, OSRAM

·Driver: HONNEX, MEANWELL, PHILIPS



Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|------------------------|---------|----------|--------|------|------|------------|----------|------------------|----------|
| FL370 LED150 150W ES | 150 | 100lm/W | 15000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 | 5years |
| FL370 LED200 200W ES | 200 | 100lm/W | 20000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 | 5years |
| FL370 LED300 300W ES | 300 | 100lm/W | 30000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 | 5years |
| FL370 LED400 400W ES | 400 | 100lm/W | 40000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 | 5years |
| FL370 LED500 500W ES | 500 | 100lm/W | 50000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 | 5years |
| FL370 LED800 800W ES | 800 | 100lm/W | 80000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 | 5years |
| FL370 LED1000 1000W ES | 5 1000 | 100lm/W | 100000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 | 5years |



High mast light FL610

HONNEX



The FL610 high mast light is designed for night lighting is outdoor places. The Efficacy can be 160LM/W, power can be 1000W, it can meet the night lighting requirement.

·IP65, fit for outdoor baskatball court, stadium and

·Beam angle: 25D/45D/60D, 60D*145D ·Efficacy 160LM/W, power can be 1000W

·Lifetime: 50000 Hours

·Chips: SANAN, PHILIPS, OSRAM

·Driver: HONNEX, MEANWELL, PHILIPS



Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|------------------------|---------|----------|--------|------|---------|------------|---------|------------------|----------|
| FL160 LED480 300W ES | 300 | 160lm/W | 48000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| FL160 LED640 400W ES | 400 | 160lm/W | 64000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| FL160 LED800 500W ES | 500 | 160lm/W | 80000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| FL160 LED960 600W ES | 600 | 160lm/W | 96000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| FL160 LED1280 800W ES | 800 | 160lm/W | 128000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| FL160 LED1600 1000W ES | 1000 | 160lm/W | 160000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 5years |
| FL160 LED480 300W HQ | 300 | 160lm/W | 48000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| FL160 LED640 400W HQ | 400 | 160lm/W | 64000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| FL160 LED800 500W HQ | 500 | 160lm/W | 80000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| FL160 LED960 600W HQ | 600 | 160lm/W | 96000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| FL160 LED1280 800W HQ | 800 | 160lm/W | 128000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| FL160 LED1600 1000W HC | 1000 | 160lm/W | 160000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |

*More information please check www.honnexlighting.com

Flood light FL310

HONNEX Lighting expert



The FL310 is high power LED Flood light. Special beam angle 10*90D and 50*90D, fit for tower crane and stadium, power can be 1300W. Long lifetime and good heat dissipation effect.

·IP65, fit for tower crane, stadium and so on.

·High quality Die-casting Aluminum

·Efficacy 100LM/W, power can be 1000W


·Lifetime: 50000 Hours

·Chips: SANAN, PHILIPS, OSRAM

·Driver: HONNEX, MEANWELL, PHILIPS

Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level Warr | anty |
|---------------------|---------|----------|--------|------|------|------------|----------|-----------------------|------|
| FL130 LED1000 1000W | 1000 | 100lm/W | 100000 | 0.98 | Cree | 100-305Vac | Meanwell | IP65 5ye | ars |

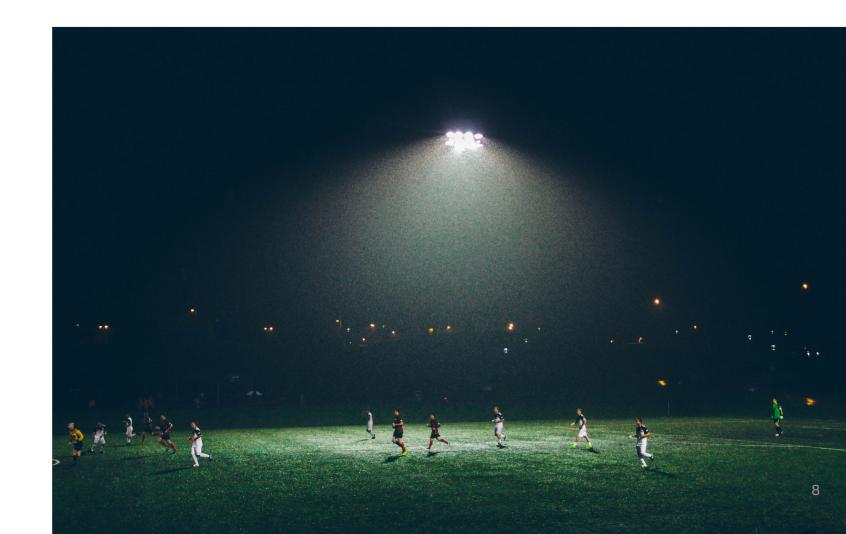





Street light RL320

HONNEX



The LED Street light RL320 using die-casting Aluminum, whole fixture can be IP65, fit for road, courtyard, landscape and so on. RL320 support 1-10V DIM, Dali DIM, and reserve ZHAGA/NAME interface.

- ·IP65, fit for road, courtyard, landscape and so on
- ·High quality Die-casting Aluminum, bean angle 60D*120D
- ·Efficacy 120LM/W
- ·Lifetime: 30000Hours/50000 Hours ·Chips: SANAN,PHILIPS,OSRAM
- ·Driver: HONNEX, MEANWELL, PHILIPS

Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|----------------------|---------|----------|--------|------|---------|------------|----------|------------------|----------|
| RL320 LED36 30W ES | 30 | 120lm/W | 3600 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL320 LED60 50W ES | 50 | 120lm/W | 6000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL320 LED120 100W ES | 100 | 120lm/W | 12000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL320 LED180 150W ES | 150 | 120lm/W | 18000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL320 LED36 30W MR | 30 | 120lm/W | 3600 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL320 LED60 50W MR | 50 | 120lm/W | 6000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL320 LED120 100W MR | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL320 LED180 150W MR | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL320 LED36 30W HQ | 30 | 120lm/W | 3600 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| RL320 LED60 50W HQ | 50 | 120lm/W | 6000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| RL320 LED120 100W HQ | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| RL320 LED180 150W HQ | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |

*More information please check www.honnexlighting.com



Street light RL310

HONNEX



To cope with the complex external environment, the LED street light RL310 also meet IP65 Standard. It can do costomized. Support 1-10V DIM, Dali DIM, and reserve ZHAGA/NAME interface.

- ·IP65, fit for road, courtyard and so on
- ·High quality Die-casting Aluminum, bean angle 70D*155D
- ·Efficacy 120LM/W
- ·Lifetime: 30000Hours/50000 Hours
- ·Chips: SANAN, PHILIPS, OSRAM
- ·Driver: HONNEX, MEANWELL, PHILIPS



| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|----------------------|---------|----------|--------|------|---------|------------|----------|------------------|----------|
| RL310 LED120 100W ES | 100 | 120lm/W | 12000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL310 LED180 150W ES | 150 | 120lm/W | 18000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL310 LED240 200W ES | 200 | 120lm/W | 24000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL310 LED300 250W ES | 250 | 120lm/W | 30000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL310 LED360 300W ES | 300 | 120lm/W | 36000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| RL310 LED120 100W MR | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL310 LED180 150W MR | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL310 LED240 200W MR | 200 | 120lm/W | 24000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL310 LED300 250W MR | 250 | 120lm/W | 30000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL310 LED360 300W MR | 300 | 120lm/W | 36000 | 0.98 | PHILIPS | 100-305Vac | Meanwell | IP65 | 5years |
| RL310 LED120 100W HQ | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| RL310 LED180 150W HQ | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| RL310 LED240 200W HQ | 200 | 120lm/W | 24000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| RL310 LED300 250W HQ | 250 | 120lm/W | 30000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| RL310 LED360 300W HQ | 300 | 120lm/W | 36000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |

*More information please check www.honnexlighting.com

9 10



Tunnel light TL810_

HONNEX



The TL180 LED Tunnel light use fins heat dissipation technology design, have much bigger heat dissipation area and better heat dissipation efficacy. The modular design also better for control the cost. The special lens can give us better looking and avoid glare.

- ·IP65, suitable for tunnel and some outdoor area.
- ·Beam angle 60D/90D/60D*150D
- ·Efficacy 120LM/W, Energy saving, Green.
- ·Lifetime: 30000Hours/50000 Hours
- ·Chips: SANAN, PHILIPS, OSRAM
- ·Driver: HONNEX, MEANWELL, PHILIPS

Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|----------------------|---------|----------|--------|------|---------|------------|---------|------------------|----------|
| TL810 LED60 50W ES | 50 | 120lm/W | 6000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED120 100W ES | 100 | 120lm/W | 12000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED180 150W ES | 150 | 120lm/W | 18000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED240 200W ES | 200 | 120lm/W | 24000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED300 250W ES | 250 | 120lm/W | 30000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED360 300W ES | 300 | 120lm/W | 36000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED480 400W ES | 400 | 120lm/W | 48000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED600 500W ES | 500 | 120lm/W | 60000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED60 50W HQ | 50 | 120lm/W | 6000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED120 100W HQ | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED180 150W HQ | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED240 200W HQ | 200 | 120lm/W | 24000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED300 250W HQ | 250 | 120lm/W | 30000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED360 300W HQ | 300 | 120lm/W | 36000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED480 400W HQ | 400 | 120lm/W | 48000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED600 500W HQ | 500 | 120lm/W | 60000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |

*More information please check www.honnexlighting.com



Tunnel light TL820

HONNEX



The TL820 LED Tunnel light using Convection cooling design. The special lens can give us better looking and avoid glare.

- ·IP65, suitable for tunnel and some outdoor area.
- ·Beam angle 60D/90D/60D*150D
- ·Efficacy 120LM/W, Energy saving, Green.
- ·Lifetime: 30000Hours / 50000 Hours
- ·Chips: SANAN, PHILIPS, OSRAM
- ·Driver: HONNEX, MEANWELL, PHILIPS



Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Leve | l Warranty |
|----------------------|---------|----------|--------|------|---------|------------|---------|-----------------|------------|
| TL820 LED60 50W ES | 50 | 120lm/W | 6000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED120 100W ES | 100 | 120lm/W | 12000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED180 150W ES | 150 | 120lm/W | 18000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED240 200W ES | 200 | 120lm/W | 24000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED300 250W ES | 250 | 120lm/W | 30000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED360 300W ES | 300 | 120lm/W | 36000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED480 400W ES | 400 | 120lm/W | 48000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED600 500W ES | 500 | 120lm/W | 60000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL820 LED720 600W ES | 600 | 120lm/W | 72000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL810 LED60 50W HQ | 50 | 120lm/W | 6000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED120 100W HQ | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED180 150W HQ | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED240 200W HQ | 200 | 120lm/W | 24000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED300 250W HQ | 250 | 120lm/W | 30000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED360 300W HQ | 300 | 120lm/W | 36000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED480 400W HQ | 400 | 120lm/W | 48000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL810 LED600 500W HQ | 500 | 120lm/W | 60000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL820 LED720 600W HQ | 600 | 120lm/W | 72000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |



Tunnel light TL830_

HONNEX




The TL830 LED Tunnel light using Convection heat dissipation design. Under the premise of ensuring product quality, we updated the design of body, this design make TL830 have much lower cost and thinner, lifetime and firmness same as before.

- ·IP65, suitable for tunnel and various outdoor area.
- ·Beam angle 30D/60D/90D/80D*155D
- ·Efficacy 120LM/W, Energy saving, Green.
- ·Lifetime: 30000Hours / 50000 Hours
- ·Chips: SANAN, PHILIPS, OSRAM
- ·Driver: HONNEX, MEANWELL, PHILIPS

Specification

| Model | Wattage | Efficacy | Lumens | PF | Chip | Voltage | Driver | Protection Level | Warranty |
|----------------------|---------|----------|--------|------|---------|------------|---------|------------------|----------|
| TL830 LED60 50W ES | 50 | 120lm/W | 6000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL830 LED120 100W ES | 100 | 120lm/W | 12000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL830 LED180 150W ES | 150 | 120lm/W | 18000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL830 LED240 200W ES | 200 | 120lm/W | 24000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL830 LED300 250W ES | 250 | 120lm/W | 30000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL830 LED360 300W ES | 300 | 120lm/W | 36000 | 0.98 | Sanan | 100-305Vac | HONNEX | IP65 | 3years |
| TL830 LED60 50W HQ | 50 | 120lm/W | 6000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL830 LED120 100W HQ | 100 | 120lm/W | 12000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL830 LED180 150W HQ | 150 | 120lm/W | 18000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL830 LED240 200W HQ | 200 | 120lm/W | 24000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL830 LED300 250W HQ | 250 | 120lm/W | 30000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |
| TL830 LED360 300W HQ | 300 | 120lm/W | 36000 | 0.98 | PHILIPS | 220-240Vac | PHILIPS | IP65 | 5years |

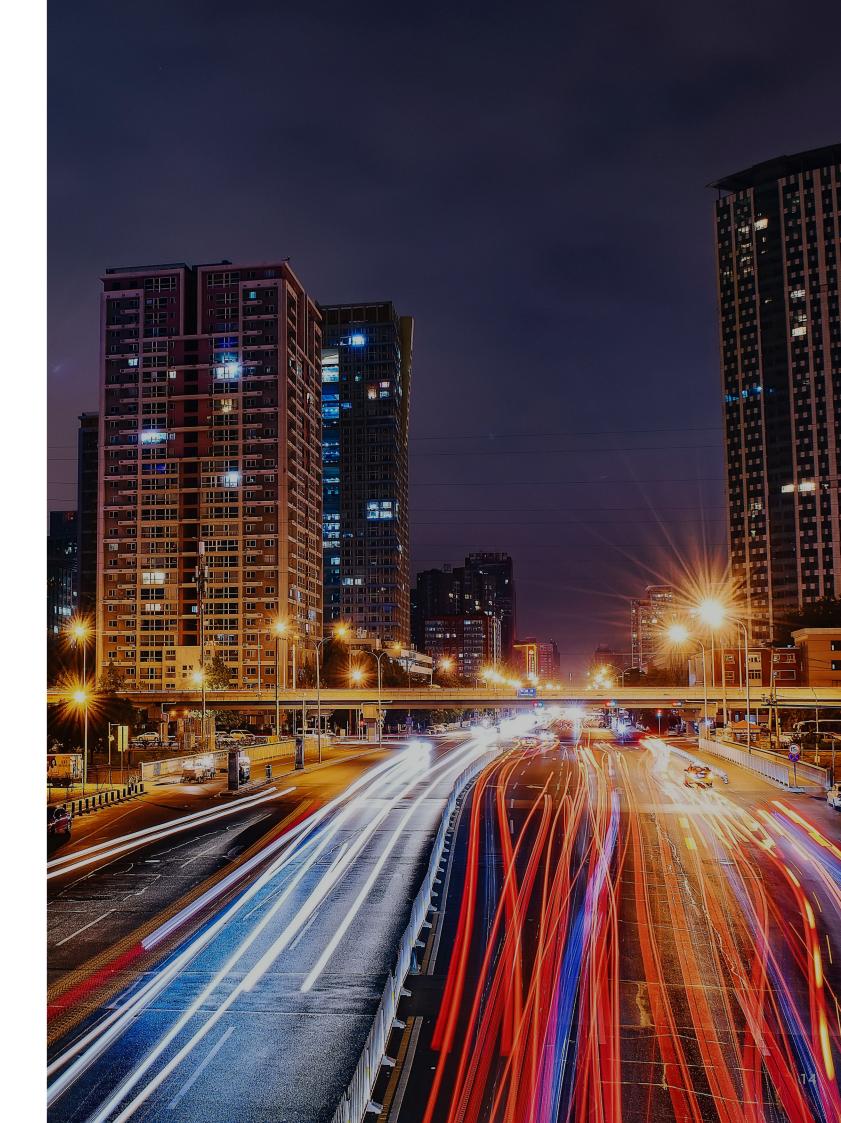





Solar street light SOL610

HONNEX




The SOL610 is compact Solor LED Street light. It make Solor panel, Battery, Controller, Sensor, Light all inside the Aluminum fixture. It is much conveniently to install, simple and stylish. SOL610 have Time-controlled dimming, Light Dimming, Dynamic induction dimming, easy for control; It also can update into smart control system, to control several light.

- ·IP65, suitable for Road, Courtyard and various scence.
- ·Beam angle 140D*70D
- ·Efficacy 160LM/W, Solor panel 25 years warranty
- ·Under full charged battery, can work 3-5 days without sunshine
- ·Chips: SANAN, PHILIPS, OSRAM
- ·With sensor, support Time-controlled dimming,Light Dimming,Dynamic induction dimming

Specification

| Model | Wattage | Lumens | Batter Capadry | Controller | Chip | Beam Angle | Working Time | Power of Solar Panels | Batter Warranty |
|--------------------|---------|---------|-------------------|------------|---------|------------|-----------------|--------------------------|--------------------|
| SOL610 LED32 20W | 20 | 160lm/W | 133WH | PWM | PHILIPS | 140×70° | 3-5days | 35W | 3years |
| SOL610 LED48 30W | 30 | 160lm/W | 233WH | PWM | PHILIPS | 140×70° | 3-5days | 45W | 3years |
| SOL610 LED64 40W | 40 | 160lm/W | 244WH | PWM | PHILIPS | 140×70° | 3-5days | 60W | 3years |
| SOL610 LED80 50W | 50 | 160lm/W | 333WH | PWM | PHILIPS | 140×70° | 3-5days | 70W | 3years |
| SOL610 LED96 60W | 60 | 160lm/W | 399WH | MMPT | PHILIPS | 140×70° | 3-5days | 90W | 3years |
| SOL610 LED128 80W | 80 | 160lm/W | 444WH | MMPT | PHILIPS | 140×70° | 3-5days | 110W | 3years |
| SOL610 LED160 100W | 100 | 160lm/W | 555WH | MMPT | PHILIPS | 140×70° | 3-5days | 120W | 3years |
| SOL610 LED192 120W | 120 | 160lm/W | 666WH | MMPT | PHILIPS | 140×70° | 3-5days | 150W | 3years |

*More information please check www.honnexlighting.com

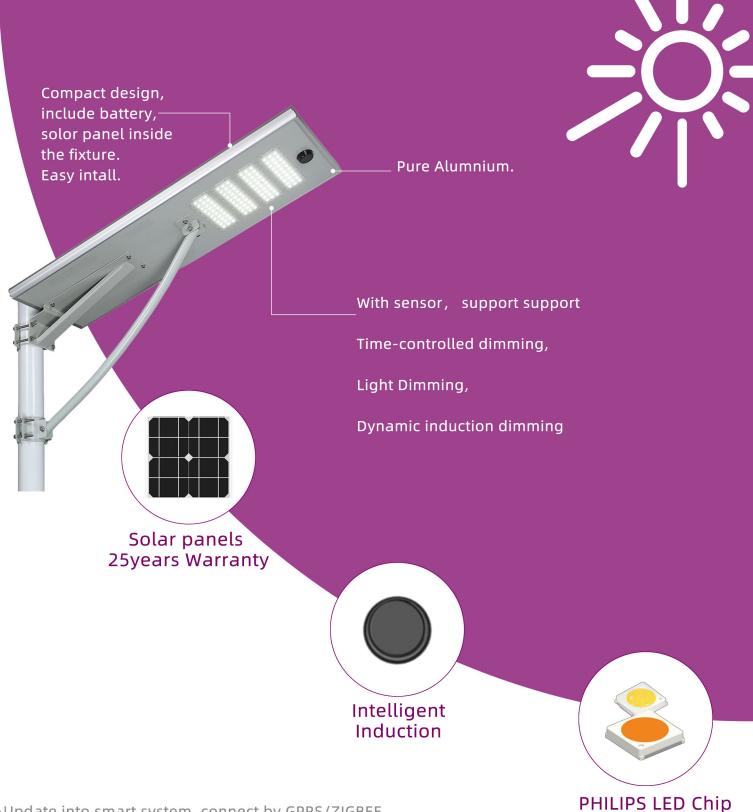

·Update into smart system, connect by GPRS/ZIGBEE

Honnex cooperated with Smart control system supplier,
using advanced wireless remote operating system, offer client smart system solution.



16

15



ADD:NO. 30 LIYANG NEW ROAD,LU CHENG,WENZHOU CHINA TEL:86-577-89887719
WEB:www.honnexlighting.com
Email:info@honnex-go.com